

Eco Flex.par C

Thermo-plastic mudguards

Single-axe thermoplastic mudguard manufactured through injection moulding using post-consumer recycled polypropylene (minimum PCR content $\geq 50\%$), suitable for automotive use.



Material

R-PP

Colour


Matte black

Technical specifications

- Smooth finish.
- High resistance to both high and low temperatures.
- Excellent resistance to diesel fuel and chemicals.
- Anti-UV treatment for increased durability over time.
- Lightweight, facilitating transport and installation while helping reduce vehicle fuel consumption.

Sustainability

The Eco Flex.par line is manufactured using raw materials with a minimum of 50% post-consumer recycled (PCR) content—a choice that combines high performance with reduced environmental impact. Furthermore, the thermoplastic mudguards are fully recyclable at the end of their life cycle.

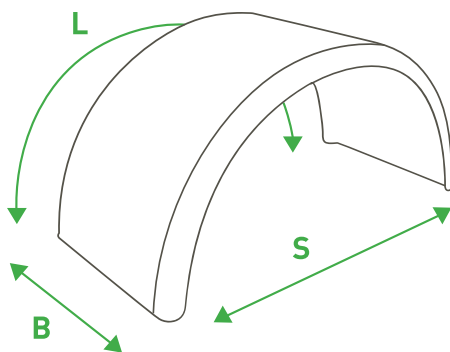

Anti-spray system

Designed for the simple and quick installation of Flex.spray mud flaps (excluding items EM270.000, EM400.000, EM450.030). Also available, upon request, in a pre-assembled configuration with integrated anti-spray.

Customizations

Custom colour: available with a minimum order of 1,000 pieces. Company logo: applicable via screen printing.

Installation

Pre-drilled holes and brackets (upon request). Simple and quick installation.

Accessories

Various mounting kits available.

Item code	B	L	S*	Weight (Kg)
EM270.000	270	1380	880	1.268
EM400.000	400	1380	880	1.826
EM450.000	450	2100	1340	3.720
EM450.010	450	1900	1300	3.086
EM450.030	450	1380	880	2.032
EM500.000	500	1580	1000	2.628
EM550.000	550	1750	1150	3.340
EM600.017	600	1750	1150	3.430
EM650.000	650	2100	1340	4.670
EM650.010	650	1900	1300	4.600
EM650.020	650	1800	1250	4.000

S* - Dimensional tolerance ± 50 mm