# Eco Flex.par FT

## Plastic flat top mudguards

Thermoplastic mudguard manufactured through **injection moulding** using post-consumer recycled polypropylene (minimum PCR content ≥50%), suitable for automotive use.

### Material

R-PP

### Colour

Matte black

### Technical characteristics

- Smooth finish.
- High resistance to both high and low temperatures.
- Excellent resistance to diesel fuel and chemicals.
- Anti-UV treatment for increased durability over time.
- Lightweight, facilitating transport and installation while helping reduce vehicle fuel consumption.

### Sustainability

The Eco Flex.par line is manufactured using raw materials with a minimum of 50% post-consumer recycled (PCR) content—a choice that combines high performance with reduced environmental impact. Furthermore, the thermoplastic mudguards are fully recyclable at the end of their life cycle.

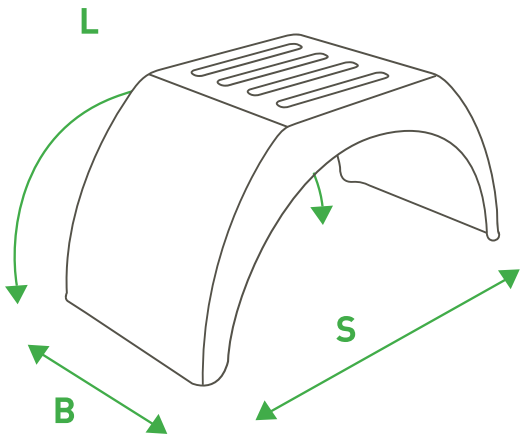


### Customizations

Custom colour: available with a minimum order of 1,000 pieces. Company logo: applicable via screen printing or embossed injection molding.

### Assembly

Pre-drilled holes and brackets available upon request. Easy and quick installation.

### Accessories

Various mounting kits available.

| Item code | B | L | S* | Weight (Kg) |
|---|---|---|---|---|
| EM280.000 | 280 | 1450 | 900 | 1.510 |
| EM450.020 | 450 | 1450 | 900 | 2.480 |

S* - Dimensional tolerance ± 50 mm



Copyright © BMC SRL, Via E. Sogno, 15 - 35010 Loc. Villalta di Gazzo Padovano (PD), +39 049 9426217, info@bmcflexpar.com, www.bmcflexpar.com